
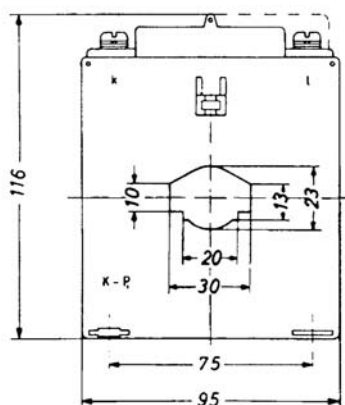
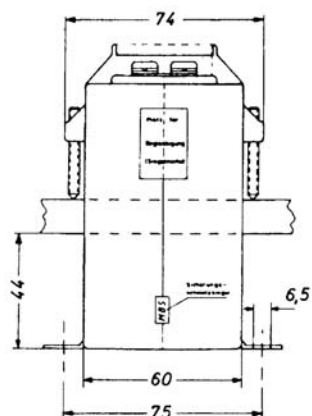


EASK 31.6

Aufsteck-Stromwandler

zugelassener Verrechnungs-Stromwandler

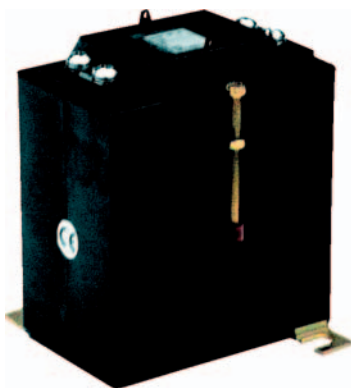

Sekundärstrom		5A			1A	
Primär-Strom A	Bem.- Leist. VA	Genauigkeitsklasse			Genauigkeitsklasse	
		0,5	0,5s	0,2	0,5	0,2
		Best.-Nr.	Best.-Nr.	Best.-Nr.	Best.-Nr.	Best.-Nr.
50	2,5	10547	10585		10747	
75	2,5	10548	10586		10748	
	5	10549	10587		10749	
100	2,5	10550	10588	10513	10750	10713
	5	10551	10589	10514	10751	10714
	10	10552	10590		10752	
150	2,5	10553	10591	10516	10753	10716
	5	10554	10592	10517	10754	10717
	10	10555	10593		10755	
	15	10556	10594		10756	
200	5	10557	10595	10521	10757	10721
	10	10558	10596	10522	10758	10722
	15	10559	10597		10759	
250	5	10560	10598	10524	10760	10724
	10	10561	10599	10525	10761	10725
	15	10563	10600		10763	
300	5	10565	10602	10528	10765	10728
	10	10566	10603	10529	10766	10729
	15	10567	10604		10767	
	30	10568	10605		10768	
400	5	10569	10606	10532	10769	10732
	10	10570	10607	10533	10770	10733
	15	10571	10608	10534	10771	10734
	30	10572	10609		10772	
500	5	10573	10610	10536	10773	10736
	10	10574	10611	10537	10774	10737
	15	10575	10612	10538	10775	10738
	30	10576	10613		10776	
600	5	10577	10614	10540	10777	10740
	10	10578	10615	10541	10778	10741
	15	10579	10616	10542	10779	10742
	30	10580	10617		10780	
750	5	10581	10618	10543	10781	10743
	10	10582	10619	10544	10782	10744
	15	10583	10620	10545	10783	10745
	30	10584	10621		10784	

Primärleiter	30 x 10 mm 20 x 13 mm
Rundleiter	Ø 23 mm
Wandlerbreite	95 mm
Schnappbefestigung	—
Plombierplatte	Best.-Nr. 59044 siehe Seite 195
Industrie-Stromwandler	siehe Seite 45
Schutz-Aufsteck-Stromwandler	siehe Seite 122