

CUENTAHORAS


Control de horas de funcionamiento de máquinas y equipos.

- Contador: mecánico, 7 dígitos (99999,99)
- Tensión (Vn): 115, 230, 400 V
- Margen de tensión: $\pm 10\%$ Vn
- Consumo propio: 10 mA
- Frecuencia: 50 ó 60 Hz




Modelo		HC5R	HC5	HC4	HC3
Dimensiones	mm	48x48 Carril DIN	48x48	72x72	96x96
Peso aprox.	kg.	0,08	0,06	0,14	0,175

Dimensiones (mm)

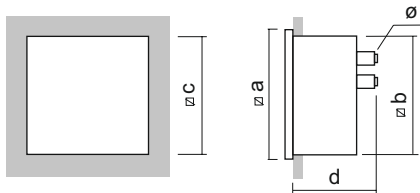

Modelos	Rango	∅a	∅b	∅c	d	ø
HC5	115÷400	48	44,5	45,2 ^{+0,6}	34	M.3
HC4	115÷400	72	66,5	68 ^{+0,7}	60	M.3
HC3	115÷400	96	89	92 ^{+0,8}	60	M.3



Modelos	Rango	∅a	∅b	∅c
HC5R	115÷400	48	44,5	40

* Soporte de fijación a Carril DIN

Esquemas de conexión

